



TECHNICAL DATA / FEATURES

dimensions:	Ø220x87
light function:	driving, parking
lamp function markings:	HR, A
maximum power:	27W, 3W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10,5V-30V DC
reference mark:	50, 25
source of light:	6 x LED
IP rating:	IP67, IP69K
work temperature:	-40°C - +80°C
housing's material:	aluminium
lens' material:	glass
built-in connectors:	-
other:	protection:
	• against overheating
	• against reverse polarisation
	screws made of Inox steel



ADDITIONAL INFORMATION

Stylish and robust lamps dedicated for trucks.

LED technology used in driving and position light guarantees the highest efficiency. Two reference marks are available what allows to choose optimal light range.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.


Mounting: as a freestanding or on vertical body work panels.

It is possible to install needed connectors on wire (on request).

Equivalents for Hella:

LUM1.50800 - 1F8 011 002-001

DIMENSIONS

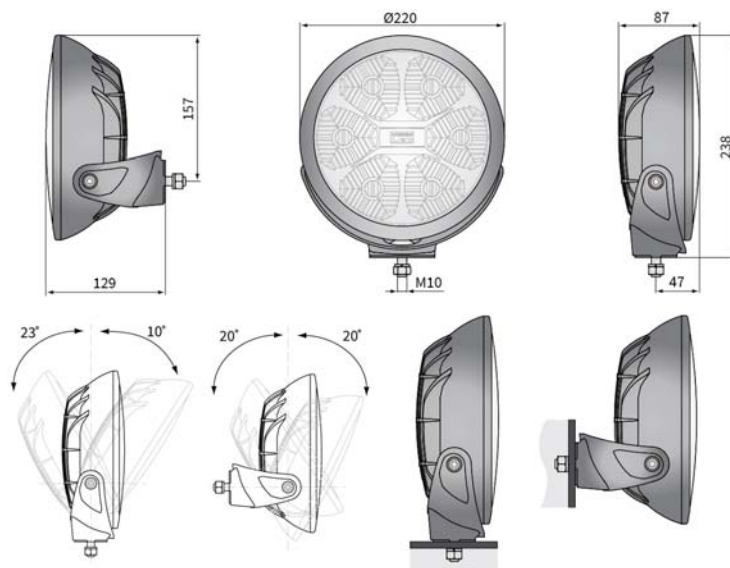

Cat. number	Homologation code	Light function	Reference mark	IP rating	Accessories	Connectors	Mounting	rear
LUM1.50800	084	✓ driving ✓ parking	✓ 50	✓ 25	✓ LED module 12V-24V ✓ cable 0,5 m	AMP Faston 250 AMP Superseal 1,5 Deutsch DT	✓ bracket	✓ rear
LUM1.50850	087	✓ driving ✓ parking	✓ 50	✓ 25	✓ LED module 12V-24V ✓ cable 0,5 m	AMP Faston 250 AMP Superseal 1,5 Deutsch DT	✓ bracket	✓ rear

