

dimensions:	138x78x68	
light functions:	fog light	driving
function markings:	B	HR
reference mark:	-	12,5
source of light:	H3	
maximum power:	70W	
rated voltage:	12-24V DC	
optics:	standard	
IP rating:	IP66	
housing's material:	plastic	
housing's colour:	black	
lens' material:	glass	
lens' colour:	clear, amber	
mounting:	M8	
built-in connectors:	-	
other:	semipermeable membrane	



Mounting: factory prepared places, built-in to vehicle's recess, as a freestanding on the body work.

They can be installed in an upright or upside down position.




It is possible to install needed connectors on wire (on request).

Additional equipment:

stone guard - cat. No. A37900
lens cover - cat. No. A.37901

Useful parts while installing:

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
Deutsch plug DT06-2S 2-pin - cat. No. A.07135

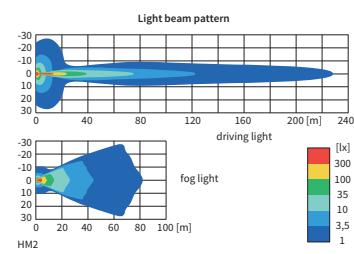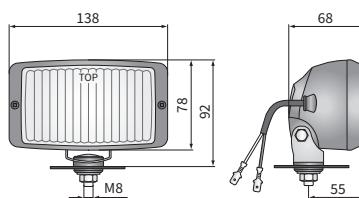

Cat. number	Homologation code	Light functions	fog light	driving	Lens colour	clear	amber	Accessories	cable 0,15 m	Side	right	left	Connectors	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	Packaging / pc	carton box
HM2.19071	198		✓			✓			✓		✓	✓					1	
HM2.19171	198		✓	✓			✓		✓		✓	✓					1	
HM2.19271	200			✓		✓	✓		✓		✓	✓					1	
HM2.19371	200			✓					✓		✓	✓					1	