

luminous flux:	2000 lm	1500 lm	1000 lm
maximum power:	21W	18W	14,5W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	1,2A	1,1A	0,9A
current at 28V:	0,6A		0,5A
maximum current:	2,2A	1,1A	0,9A
colour temperature:	6000÷6500K	5000÷5500K	
beam:	wide		
beam angle:	58°		
IP rating:	IP67, IP69K, IP66		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	III	V	
built-in connectors:	AMP Faston 250, Deutsch DT, AMP SuperSeal 1,5		
other:	protection: - against overheating - against reverse polarisation		



The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.

They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:


neodymium magnet $\phi 66/230N$ (1 pc.) - cat. No. CAR4.51315

Equivalents for Hella:


CRC5F.52001 - 1GO 996 476-001

CRC5E.51901 - 1GO 996 276-451

CRC5E.51906 - 1GO 996 276-481

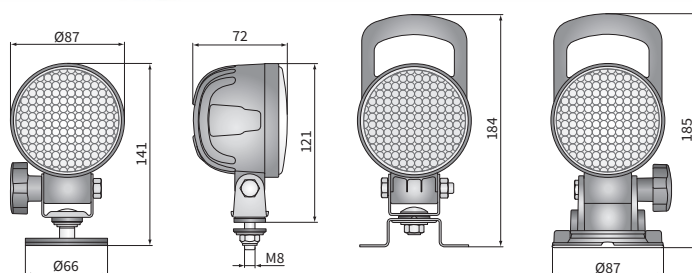

Lamp positioning: 8° from the vertical plane, h=2,5m

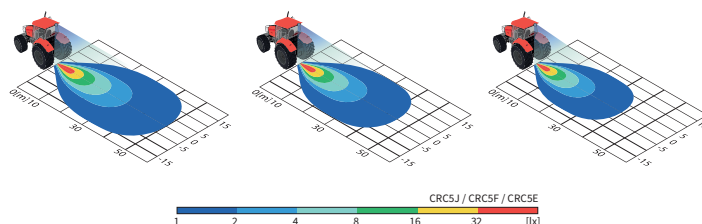

Cat. number	Luminous flux	2000 lm	1500 lm	1000 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0,15 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	suction cup holder	case	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
CRC5J.53401	✓						✓	✓		✓													
CRC5J.53406	✓						✓	✓		✓											✓		
CRC5J.53414	✓							✓	✓	✓												✓	
CRC5J.53415	✓						✓	✓		✓													✓
CRC5J.53453	✓							✓	✓	✓					✓	✓	✓	✓					
CRC5J.53455	✓							✓	✓	✓	✓				✓	✓	✓	✓					
CRC5J.53456	✓							✓	✓	✓	✓				✓	✓	✓	✓	✓				
CRC5J.53459	✓							✓	✓	✓	✓				✓	✓	✓	✓	✓				
CRC5F.52001		✓						✓	✓	✓			✓										
CRC5F.52006			✓				✓		✓	✓											✓		
CRC5F.52014			✓					✓	✓	✓												✓	
CRC5F.52002		✓						✓	✓	✓		✓											✓

Cat. number	Luminous flux	2000 lm	1500 lm	1000 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0,15 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	neodymium magn. holder	suction cup holder	case	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
CRC5F.52015			✓				✓	✓		✓													✓
CRC5F.52053			✓					✓	✓	✓					✓	✓	✓	✓					
CRC5F.52055			✓					✓	✓	✓					✓	✓	✓	✓					
CRC5F.52056			✓					✓	✓	✓					✓	✓	✓	✓	✓				
CRC5F.52059			✓					✓	✓	✓					✓	✓	✓	✓	✓				
CRC5E.51901			✓					✓	✓	✓			✓										
CRC5E.51906			✓				✓		✓	✓											✓		
CRC5E.51914			✓					✓	✓	✓												✓	
CRC5E.51913							✓		✓	✓													✓
CRC5E.51952			✓					✓	✓	✓					✓	✓	✓	✓					
CRC5E.51953			✓					✓	✓	✓					✓	✓	✓	✓					
CRC5E.51956			✓					✓	✓	✓					✓	✓	✓	✓	✓				
CRC5E.51959			✓					✓	✓	✓					✓	✓	✓	✓	✓				