

luminous flux:	3000 lm
maximum power:	40W
rated voltage:	12÷24V DC
permissible voltage:	10,5÷30V DC
current at 13,2V:	2,9A
current at 28V:	1,4A
maximum current:	2,9A
colour temperature:	5000±5500K
beam:	wide
beam angle:	40° x 25°
IP rating:	IP67, IP69K
work temperature:	-40°C ÷ 80°C
housing's material:	aluminium
lens' material:	plastic
corrosion resistance:	ISO 9227, 500h
vibration resistance:	15,3G 24÷2000Hz
EMC Class CISPR 25:	V
built-in connectors:	-
other:	protection: - against overheating - against reverse polarisation



The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence. Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess.

Equipped with a Combo-type optical system, which combines a wide and spot beam pattern.

CRP2A products are LED replacements for halogen LPR8 lights.



Dedicated application:

A - tractors:

- Case IH serie CS
- Deutz serie Agrostar
- Fendt series: Farmer, Favorit, GT, Vario, Xylon
- Massey Ferguson series: 4200, 4300, 6100, 6200, 8100, 8200
- Steyr series: 900, 8000, 9000

- agricultural harvesters:

- Case IH serie CF
- Claas series: Lexion, Medion
- Sampo serie SR

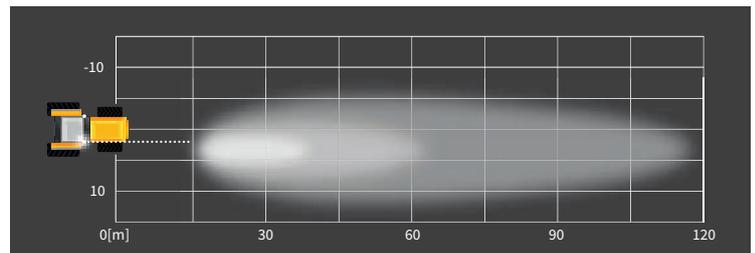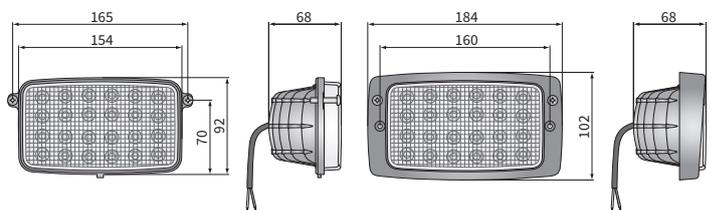

Cat. number	Luminous flux		Rated power		IP rating		Accessories		Connectors	Deutsch DT	AMP SuperSeal 1,5	Application	
	3000 lm	✓	40W	✓	IP67	✓	IP69K	✓				dedicated	A
CRP2A.55350	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRP2A.55351	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

