

luminous flux:	2000 lm	1500 lm
maximum power:	22W	18W
rated voltage:	12÷24V DC	
permissible voltage:	10,5÷30V DC	
current at 13,2V:	1,6A	1,1A
current at 28V:	0,9A	0,6A
maximum current:	1,6A	1,1A
colour temperature:	6000÷6500K	5000÷5500K
beam:	wide	
beam angle:	60°	
IP rating:	IP67, IP69K, IP66	
work temperature:	-40°C ÷ 80°C	
housing's material:	aluminium	
lens' material:	plastic	
corrosion resistance:	ISO 9227, 500h	
vibration resistance:	15,3G 24÷2000Hz	
EMC Class CISPR 25:	V	
built-in connectors:	AMP Faston 250, Deutsch DT, AMP SuperSeal 1,5	
other:	protection: - against overheating - against reverse polarisation	




The lamps comply with EMC Directive 2004/108/EC.
They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.
Mounting: as a freestanding on body panels.
They can be installed in an upright or upside down position.
The bracket parts are made of Inox steel.
Different colours of the frame are available: i.e. red, yellow (option).
It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
Deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:
neodymium magnet Ø89/500N (1 pc.) - cat. No. CAR4.51320

Equivalents for Hella:
CRV2A.49600 - 1GM 996 136-361
CRV2A.49610 - 1GM 996 136-311

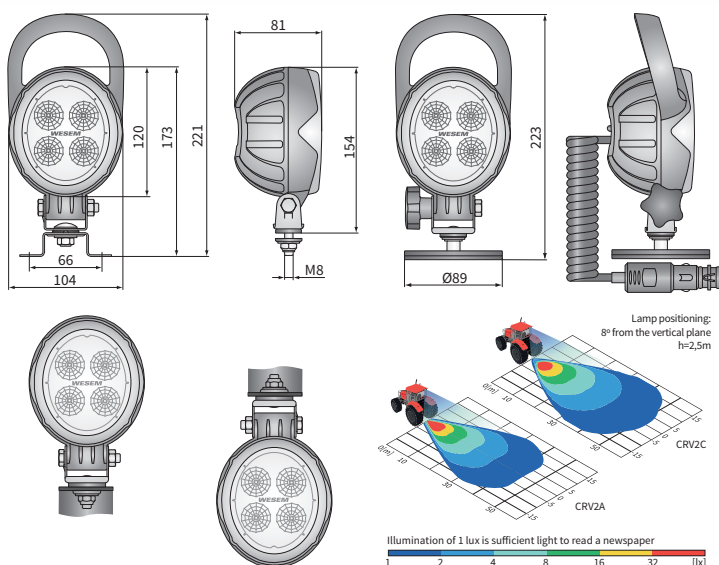

Cat. number	Luminous flux		IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V handle	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	Bracket	M8	omega	neodymium magn.	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	H9-H11
	2000 lm	1500 lm																			
CRV2C.56100	✓				✓	✓	✓	✓					✓								
CRV2C.56106	✓			✓	✓	✓	✓	✓					✓				✓				
CRV2C.56107	✓				✓	✓	✓	✓					✓								
CRV2C.56108	✓				✓	✓	✓	✓					✓								
CRV2C.56103	✓				✓	✓	✓	✓	✓				✓							✓	
CRV2A.49600		✓			✓	✓	✓	✓	✓				✓								
CRV2A.49680		✓			✓	✓	✓	✓	✓	✓			✓								
CRV2A.49606		✓		✓	✓	✓	✓	✓					✓				✓				
CRV2A.49607		✓			✓	✓	✓	✓					✓					✓			
CRV2A.49608		✓			✓	✓	✓	✓					✓						✓		
CRV2A.49610		✓			✓	✓	✓	✓	✓				✓							✓	
CRV2A.49681		✓			✓	✓	✓	✓	✓	✓			✓								
CRV2A.49616		✓		✓	✓	✓	✓	✓	✓				✓				✓				
CRV2A.49617		✓			✓	✓	✓	✓	✓				✓					✓			

Cat. number	Luminous flux		IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V handle	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	Bracket	M8	omega	neodymium magn.	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	H9-H11
	2000 lm	1500 lm																			
CRV2A.49618		✓			✓	✓	✓	✓						✓							
CRV2A.49620		✓			✓	✓	✓	✓						✓							
CRV2A.49682		✓			✓	✓	✓	✓	✓					✓							
CRV2A.49626		✓		✓		✓	✓	✓			✓							✓			
CRV2A.49627		✓			✓	✓	✓	✓						✓							
CRV2A.49629		✓			✓	✓	✓	✓						✓						✓	
CRV2A.49630		✓			✓	✓	✓	✓	✓					✓							
CRV2A.49683		✓			✓	✓	✓	✓	✓	✓				✓							
CRV2A.49636		✓		✓		✓	✓	✓	✓					✓				✓			
CRV2A.49637		✓			✓	✓	✓	✓	✓					✓					✓		
CRV2A.49638		✓			✓	✓	✓	✓	✓					✓						✓	
CRV2A.49684		✓			✓	✓	✓	✓	✓	✓				✓						✓	
CRV2A.49695		✓			✓	✓	✓	✓	✓	✓	✓				✓						
CRV2A.49696		✓			✓	✓	✓	✓	✓	✓	✓				✓						
CRV2A.49697		✓			✓	✓	✓	✓	✓	✓	✓				✓						