

luminous flux:	3000 lm	2500 lm	2000 lm	1500 lm
maximum power:	30W	29W	25W	24W
rated voltage:	12±24V DC			
permissible voltage:	10,5±30V DC			
current at 13,2V:	2,4A	1,8A	1,7A	1,2A
current at 28V:	1,2A	1A		0,7A
maximum current:	2,4A	1,8A	2,9A	1,2A
colour temperature:	5500±6000K		5000±5500K	5500±6000K
beam:	wide			
beam angle:	50°			
IP rating:	IP67, IP69K, IP66			
work temperature:	-40°C ÷ 80°C			
housing's material:	aluminium			
lens' material:	plastic			
corrosion resistance:	ISO 9227, 500h			
vibration resistance:	15,3G 24÷2000Hz			
EMC Class CISPR 25:	V			
built-in connectors:	Deutsch DT, AMP Faston 250, AMP SuperSeal 1,5			
other:	protection: - against overheating - against reverse polarisation			



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.


The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence. Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).


Equipped with removable protective grille. The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
 Deutsch plug DT06-2S 2-pin - cat. No. A.07135
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
 AMP Faston 250 plug 2-pin - cat. No. A.07138

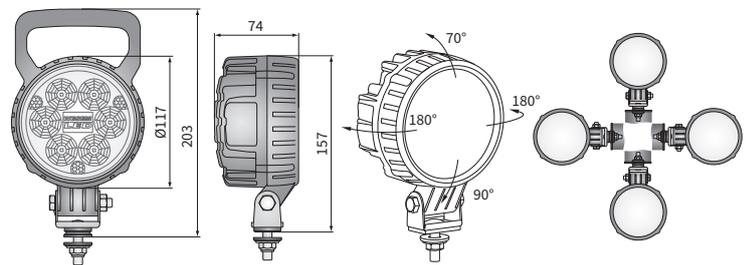

Illumination of 1 lux is sufficient light to read a newspaper
 Lamp positioning: 8° from the vertical plane h=2,5m

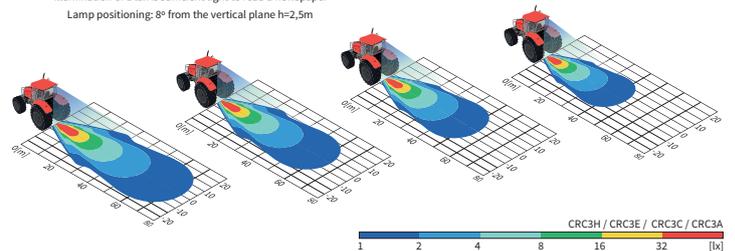

Cat. number	Luminous flux				IP rating	IP66 IP67 IP69K	Accessories	LED module 12V/24V handle cable 0,5 m cable 8 m switch	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	HB3	H9-H11
	3000 lm	2500 lm	2000 lm	1500 lm										
CRC3H.56900	✓					✓	✓	✓						
CRC3H.56907	✓					✓	✓	✓			✓			
CRC3H.56903	✓					✓	✓	✓				✓		
CRC3H.56912	✓					✓	✓	✓					✓	
CRC3E.50300		✓				✓	✓	✓						
CRC3E.50380		✓				✓	✓	✓						
CRC3E.50306		✓				✓	✓	✓		✓				
CRC3E.50307		✓				✓	✓	✓			✓			
CRC3E.50308		✓				✓	✓	✓			✓			
CRC3E.50310		✓				✓	✓	✓						
CRC3E.50381		✓				✓	✓	✓						
CRC3E.50316		✓				✓	✓	✓		✓				
CRC3E.50317		✓				✓	✓	✓			✓			
CRC3E.50318		✓				✓	✓	✓			✓			
CRC3C.50100			✓			✓	✓	✓						
CRC3C.50180			✓			✓	✓	✓						
CRC3C.50106			✓			✓	✓	✓		✓				
CRC3C.50107			✓			✓	✓	✓		✓				

Cat. number	Luminous flux				IP rating	IP66 IP67 IP69K	Accessories	LED module 12V/24V handle cable 0,5 m cable 8 m switch	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	HB3	H9-H11
	3000 lm	2500 lm	2000 lm	1500 lm										
CRC3C.50108			✓			✓	✓	✓						
CRC3C.50110			✓			✓	✓	✓						
CRC3C.50181			✓			✓	✓	✓						
CRC3C.50116			✓			✓	✓	✓						
CRC3C.50117			✓			✓	✓	✓			✓			
CRC3C.50118			✓			✓	✓	✓				✓		
CRC3A.48700			✓			✓	✓	✓						
CRC3A.48701			✓			✓	✓	✓						
CRC3A.48780			✓			✓	✓	✓						
CRC3A.48706			✓			✓	✓	✓			✓			
CRC3A.48707			✓			✓	✓	✓			✓			
CRC3A.48708			✓			✓	✓	✓				✓		
CRC3A.48710			✓			✓	✓	✓						
CRC3A.48781			✓			✓	✓	✓						
CRC3A.48716			✓			✓	✓	✓		✓				
CRC3A.48717			✓			✓	✓	✓			✓			
CRC3A.48718			✓			✓	✓	✓				✓		
CRC3A.48794			✓			✓	✓	✓				✓		