

light functions:	driving	position	driving
function markings:	HR	A	HR
traffic:	right-hand / left-hand		
reference mark:	50	-	25
maximum power:	27W	3W	27W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	1,4A	0,2A	1,4A
current at 28V:	0,7A	0,2A	0,7A
maximum current:	2A	0,2A	2A
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	glass		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	III		
built-in connectors:	-		
other:	protection: - against overheating - against reverse polarisation		



Stylish and robust lamps dedicated for trucks.

LED technology used in driving and position light guarantees the highest efficiency.

Two reference marks are available what allows to choose optimal light range.

The lamps comply with EMC Directive 2004/108/EC.


They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding or on vertical body work panels.

The bracket parts are made of Inox steel.

It is possible to install needed connectors on wire (on request).

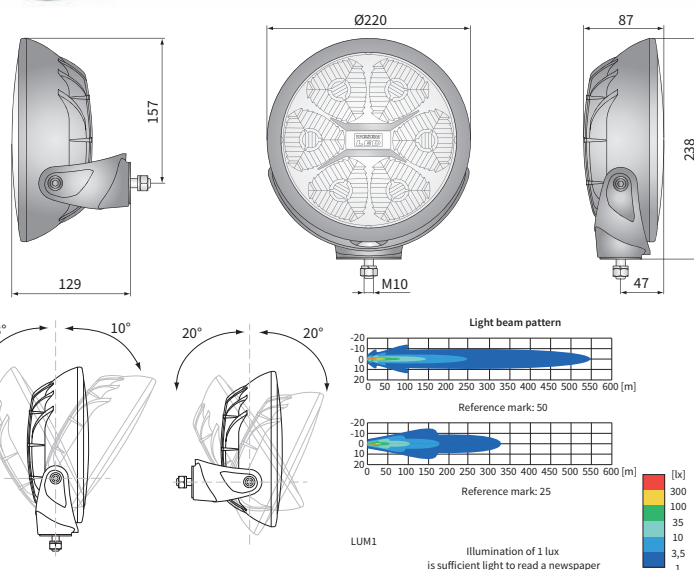

Cat. number	Hella Catal. No.	Homologation code	Light functions	Position light colour	Reference mark	IP rating	housing	Accessories	LED module 12V-24V	light cover	chrome-plated frame	black frame	red frame	cable 0,5 m	stabilizer hole	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
LUM1.50800	1F8 011 002-001	084	driving	position	clear	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50804	1F8 011 002-001	084	driving	position	orange	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50880		084	driving	position	clear	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50881		084	driving	position	orange	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50805	1F8 011 002-001	084	driving	position	clear	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50806	1F8 011 002-001	084	driving	position	orange	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50807		084	driving	position	clear	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50815		084	driving	position	orange	50	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50850		087	driving	position	clear	25	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50853		087	driving	position	orange	25	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50854		087	driving	position	clear	25	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUM1.50855		087	driving	position	orange	25	IP67	black	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓