

light functions:	driving	position
function markings:	HR	A
traffic:	right-hand / left-hand	
reference mark:	25	-
maximum power:	27W	3W
rated voltage:	12÷24V DC	
permissible voltage:	10,5÷30V DC	
current at 13,2V:	1,4A	0,2A
current at 28V:	0,7A	0,2A
maximum current:	1,9A	0,2A
IP rating:	IP67, IP69K	
work temperature:	-40°C ÷ 80°C	
housing's material:	aluminium	
lens' material:	glass	
corrosion resistance:	ISO 9227, 500h	
vibration resistance:	15,3G 24÷2000Hz	
EMC Class CISPR 25:	III	
built-in connectors:	-	
other:	protection: - against overheating - against reverse polarisation	



Stylish and robust lamps dedicated for trucks.

LED technology used in driving and position light guarentees the highest efficiency.


The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding or on vertical body work panels.

The bracket parts are made of Inox steel.

It is possible to install needed connectors on wire (on request).

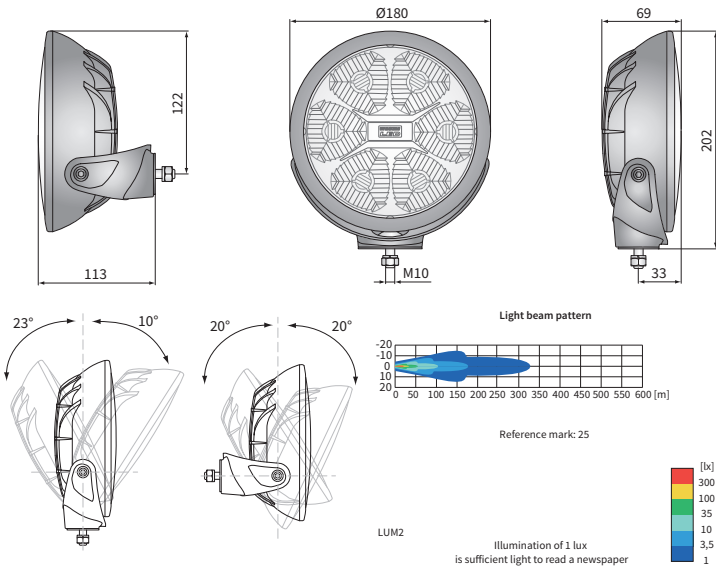

Cat. number	Hella Catal. No.	Homologation code	Light functions		Position light colour	clear	orange	IP rating	IP67	IP69K	Accessories	LED module 12V-24V	light cover	chrome-plated frame	black frame	red frame	cable 0,5 m
			driving	position													
LUM2.51200	1F3 011 815-001	086	✓	✓		✓			✓	✓		✓	✓	✓			✓
LUM2.51280		086	✓	✓		✓	✓		✓	✓		✓	✓	✓			✓
LUM2.51210	1F3 011 815-011	086	✓	✓		✓			✓	✓		✓	✓		✓		✓
LUM2.51281		086	✓	✓		✓	✓		✓	✓		✓	✓	✓			✓
LUM2.51203		086	✓	✓		✓			✓	✓		✓	✓			✓	✓