

luminous flux:	2000 lm	1500 lm	1000 lm
maximum power:	21W	18W	14,5W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	1,2A	1,1A	0,9A
current at 28V:	0,6A		0,5A
maximum current:	2,2A	1,1A	0,9A
colour temperature:	6000÷6500K	5000÷5500K	
beam:	wide		
beam angle:	35°, 58°		
IP rating:	IP67, IP69K, IP66		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h, ISO 9227, 800h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	III	V	
built-in connectors:	AMP Faston 250, Deutsch DT, AMP SuperSeal 1,5		
other:	protection: - against overheating - against reverse polarisation		



The lamps comply with EMC Directive 2004/108/EC.
They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.

They can be installed in any position (standing, hanging, on side).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

AMP Faston 250 plug 2-pin - cat. No. A.07138

Dedicated application:

A - tractors Valtra series:

A4: A74, A84, A94, A104, A114, A124, A134


G5: G105, G115, G125, G135

N4: N104, N114E, N124, N134, N154E, N174

N5: N135, N155E, N175

T4: T144, T154, T174E, T194, T214, T234

T5: T145, T155, T175E, T195, T215, T235, T255

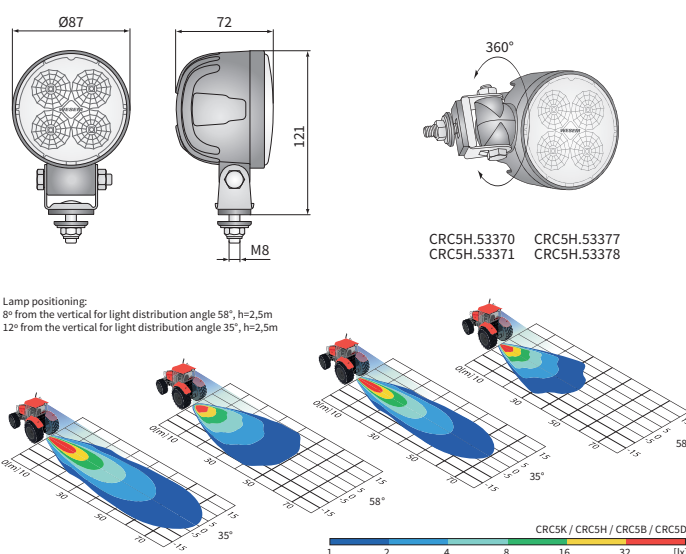

Cat. number	Luminous flux 2000 lm 1500 lm 1000 lm	Beam angle 35° 58°	IP rating IP66 IP67 IP69K	Cover color metallic black	Accessories handle cable 0,5 m cable 0,15 m swivel mount	Connectors AMP Faston 250 Deutsch DT AMP SuperSeal 1,5 H9-H11	Application dedicated
CRC5K.54801	✓	✓	✓	✓	✓		
CRC5K.54802	✓	✓	✓	✓	✓		
CRC5K.54806	✓	✓	✓	✓	✓		
CRC5K.54814	✓	✓	✓	✓	✓		
CRC5K.54813	✓	✓	✓	✓	✓		
CRC5K.54815	✓	✓	✓	✓	✓		
CRC5K.54803	✓	✓	✓	✓	✓		
CRC5H.53301	✓	✓	✓	✓	✓		
CRC5H.53305	✓	✓	✓	✓	✓		
CRC5H.53370	✓	✓	✓	✓	✓		
CRC5H.53306	✓	✓	✓	✓	✓		
CRC5H.53314	✓	✓	✓	✓	✓		
CRC5H.53313	✓	✓	✓	✓	✓		
CRC5H.53377	✓	✓	✓	✓	✓		
CRC5H.53378	✓	✓	✓	✓	✓		
CRC5H.53371	✓	✓	✓	✓	✓		
CRC5H.53315	✓	✓	✓	✓	✓		
CRC5H.53303	✓	✓	✓	✓	✓		
CRC5B.50001	✓	✓	✓	✓	✓		
CRC5B.50004	✓	✓	✓	✓	✓		
CRC5B.50006	✓	✓	✓	✓	✓		
CRC5B.50014	✓	✓	✓	✓	✓		

Cat. number	Luminous flux 2000 lm 1500 lm 1000 lm	Beam angle 35° 58°	IP rating IP66 IP67 IP69K	Cover color metallic black	Accessories handle cable 0,5 m cable 0,15 m swivel mount	Connectors AMP Faston 250 Deutsch DT AMP SuperSeal 1,5 H9-H11	Application dedicated
CRC5B.50002	✓	✓	✓	✓	✓		
CRC5B.50015	✓	✓	✓	✓	✓		
CRC5D.51601	✓	✓	✓	✓	✓		
CRC5D.51600	✓	✓	✓	✓	✓		
CRC5D.51609	✓	✓	✓	✓	✓		
CRC5D.51606	✓	✓	✓	✓	✓		
CRC5D.51614	✓	✓	✓	✓	✓		
CRC5D.51602	✓	✓	✓	✓	✓		
CRC5D.51615	✓	✓	✓	✓	✓		
CRC5A.49401	✓	✓	✓	✓	✓		
CRC5A.49404	✓	✓	✓	✓	✓		
CRC5A.49406	✓	✓	✓	✓	✓		
CRC5A.49414	✓	✓	✓	✓	✓		
CRC5A.49402	✓	✓	✓	✓	✓		
CRC5A.49415	✓	✓	✓	✓	✓		
CRC5C.51501	✓	✓	✓	✓	✓		
CRC5C.51505	✓	✓	✓	✓	✓		
CRC5C.51504	✓	✓	✓	✓	✓		
CRC5C.51506	✓	✓	✓	✓	✓		
CRC5C.51514	✓	✓	✓	✓	✓		
CRC5C.51502	✓	✓	✓	✓	✓		
CRC5C.51515	✓	✓	✓	✓	✓		