

luminous flux:	2400 lm	1600 lm	800 lm
maximum power:	27W	22W	11W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	2,2A	1,4A	0,7A
current at 28V:	1,1A	0,7A	0,4A
maximum current:	2,2A	1,4A	0,7A
colour temperature:	4500÷5000K		
beam:	wide		
beam angle:	28° x 28°, 50° x 30°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	V		
built-in connectors:	Deutsch DT, AMP SuperSeal 1,5		
other:	protection: - against overheating - against reverse polarisation		



The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.


Correct polarity required.

They can be installed in any position (standing, hanging, on side).


It is possible to install needed connectors for a version with cable (on request).

Equivalents for Hella:


CRK2C.54900 - 1GA 011 720-041

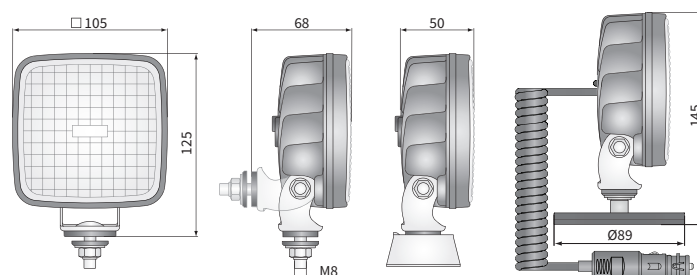

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane h=2,5m

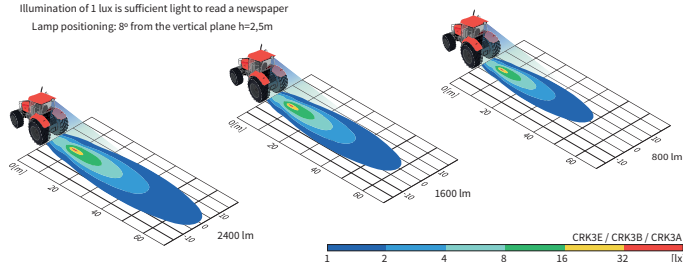

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane h=2,5m

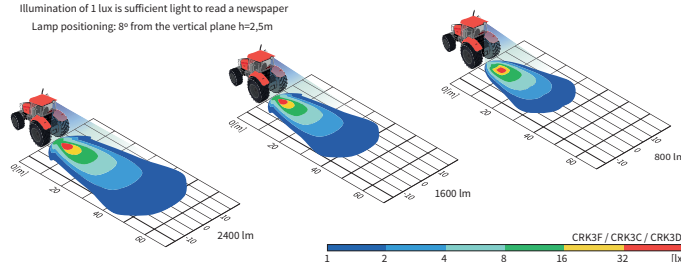

Cat. number	Luminous flux	Beam angle	Housing	Accessories	Bracket	M8	omega	neodymium magn.	Connectors	Deutsch DT	AMP SuperSeal 1,5
CRK2E.57200	2400 lm	28° x 28°	black	cable 0,5 m	✓	✓	✓	✓	✓	✓	✓
CRK2E.57240	1600 lm	50° x 30°	white	cable 8 m	✓	✓	✓	✓	✓	✓	✓
CRK2F.57300	800 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2F.57340	2400 lm	50° x 30°	white	cigarette lighter plug	✓	✓	✓	✓	✓	✓	✓
CRK2F.57350	1600 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54200	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54230	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54206	800 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54240	2400 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54250	1600 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54260	800 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54270	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54900	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54280	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2B.54290	800 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54920	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54940	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓

Cat. number	Luminous flux	Beam angle	Housing	Accessories	Bracket	M8	omega	neodymium magn.	Connectors	Deutsch DT	AMP SuperSeal 1,5
CRK2C.54930	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54950	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54960	800 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54970	2400 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54980	1600 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2C.54990	800 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54100	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54140	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54130	800 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54150	2400 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54160	1600 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54170	800 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54180	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2A.54190	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2D.55700	2400 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓
CRK2D.55750	1600 lm	50° x 30°	white	switch	✓	✓	✓	✓	✓	✓	✓
CRK2D.55770	800 lm	28° x 28°	black	switch	✓	✓	✓	✓	✓	✓	✓