

luminous flux:	2400 lm	1600 lm	800 lm
maximum power:	24W	22W	9W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	1,8A	1,2A	0,7A
current at 28V:	0,9A	0,6A	0,4A
maximum current:	1,8A	1,2A	0,7A
colour temperature:	5000÷5500K		
beam:	wide		
beam angle:	50° x 30°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	polymer		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 800h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	V		
built-in connectors:	Deutsch DT, AMP SuperSeal 1,5		
other:	protection: - against overheating - against reverse polarisation		



Economic series with thermally conductive polymer heat sink. Lightweight, fully corrosion-resistant, with optimal lighting parameters.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.


They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

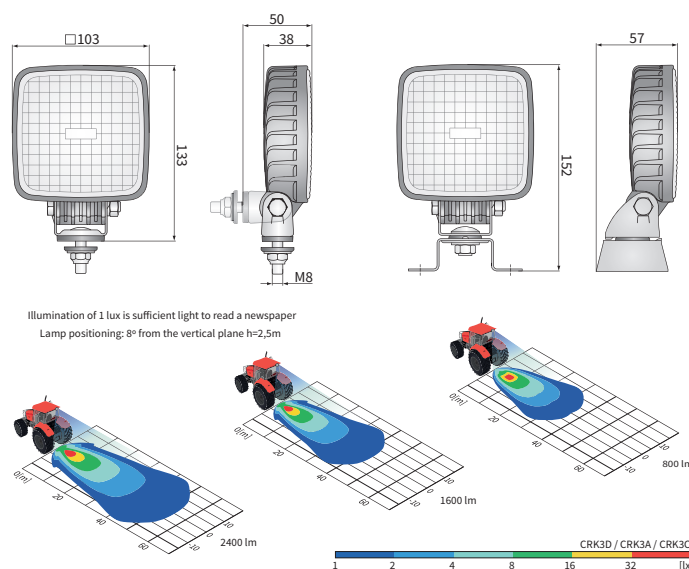

Cat. number	Luminous flux			Beam angle	Housing material	polymer	Accessories	LED module 12V/24V	LED module 12V	cable 0,5 m	SuperSeal 2S Plug	Bracket	M8	omega	Connectors	Deutsch DT	AMP SuperSeal 1,5	Packaging / pc	carton box
	2400 lm	1600 lm	800 lm																
CRK3D.62000	✓				✓	✓		✓				✓						1	1
CRK3D.62040	✓				✓	✓		✓		✓			✓					1	1
CRK3D.62050	✓				✓	✓		✓				✓				✓		1	1
CRK3D.62070	✓				✓	✓		✓				✓					✓	1	1
CRK3A.60300		✓			✓	✓		✓				✓						1	1
CRK3A.60340		✓			✓	✓		✓		✓			✓					1	1
CRK3A.60350		✓			✓	✓		✓				✓				✓		1	1
CRK3A.60360		✓			✓	✓		✓					✓			✓		1	1
CRK3A.60370		✓			✓	✓		✓				✓					✓	1	1
CRK3A.60372		✓			✓	✓		✓			✓	✓					✓	1	1
CRK3C.61700			✓		✓	✓		✓		✓		✓						1	1
CRK3C.61750			✓		✓	✓		✓				✓				✓		1	1
CRK3C.61770			✓		✓	✓		✓				✓					✓	1	1