

luminous flux:	3000 lm	2200 lm	1400 lm
maximum power:	21W	15W	19W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	1,5A	1,1A	
current at 28V:	0,8A	0,6A	
maximum current:	2A	1,7A	1,1A
colour temperature:	5000÷5500K	5500÷6000K	5000÷5500K
beam:	wide, diffused		
beam angle:	30° x 7°, 100°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	III		V
other:	protection: - against overheating - against reverse polarisation		



Especially recommended for fire trucks, ambulances, police cars, campers, trailers, lockers.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.



The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

They can be mounted horizontally, on any flat element of a vehicle body.

It is possible to install needed connectors on wire (on request).

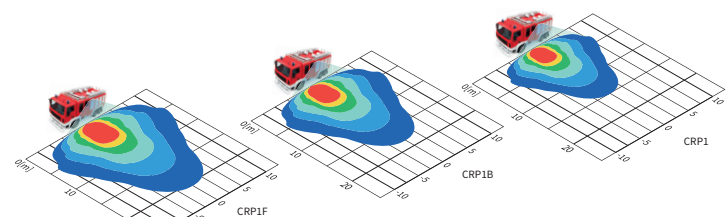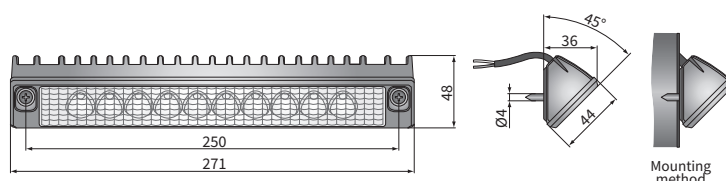

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: h=2,5m

CRP1F / CRP1B / CRP1
1 2 4 8 16 32 [lx]

Cat. number	Hella Catal. No.	Luminous flux	3000 lm	2200 lm	1400 lm	Beam angle	30° x 7°	100°	The light colour	white	orange	Colour temperature	5000÷5500K	5500÷6000K	2100K	IP rating	IP67	IP69K	Housing	black	white	red	amber	Accessories	LED module 12V-24V	cab.0.5 m
CRP1F.61800			✓				✓			✓			✓				✓	✓		✓					✓	✓
CRP1F.61802			✓				✓			✓			✓				✓	✓				✓			✓	✓
CRP1G.61900			✓					✓		✓			✓				✓	✓		✓					✓	✓
CRP1G.61901			✓					✓		✓			✓				✓	✓			✓				✓	✓
CRP1G.61902			✓					✓		✓			✓				✓	✓				✓			✓	✓
CRP1B.58800	1GB 357 098-001			✓			✓			✓				✓			✓	✓		✓					✓	✓
CRP1D.59100				✓				✓		✓				✓			✓	✓		✓					✓	✓
CRP1E.61400				✓				✓			✓			✓			✓	✓		✓					✓	✓
CRP1D.59101				✓				✓		✓				✓			✓	✓			✓				✓	✓
CRP1B.58801				✓			✓			✓				✓			✓	✓							✓	✓
CRP1B.58802				✓			✓			✓				✓			✓	✓			✓				✓	✓
CRP1B.58803				✓			✓			✓				✓			✓	✓					✓		✓	✓
CRP1.54600					✓		✓			✓			✓				✓	✓			✓				✓	✓
CRP1C.59000	1GD 996 098-001				✓			✓		✓			✓				✓	✓		✓					✓	✓
CRP1C.59001					✓			✓		✓			✓				✓	✓			✓				✓	✓
CRP1C.59002					✓			✓		✓			✓				✓	✓				✓			✓	✓
CRP1.54601					✓		✓			✓			✓				✓	✓			✓				✓	✓
CRP1.54602					✓		✓			✓			✓				✓	✓				✓			✓	✓
CRP1.54603					✓		✓			✓			✓				✓	✓					✓		✓	✓

